


OFFSHORE RESONANCE TEST SYSTEM (RTS)




- Delivering 24/7 support our people and equipment available at short notice
- Experienced in house team of technicians and support staff
- Provides confidence in assets integrity & healthcare with full string testing from the offshore substation
- Offers full compliance of AC Withstand test in line with IEC 63026:2019
- Modular design allows system to expand as required, system is fully stackable to save deck space
- DNV rated, fully marinised to withstand the harsh offshore environment



Renewables Offshore Services

JDR's is delighted to offer this market leading resonance testing system. Designed completely with the offshore environment in mind. This AC Withstand system fully complies to IEC 63026:2019 and provides confidence to asset owners and insurers in the quality of the installation. The system is modular and allows easy modification to suit the windfarm needs.

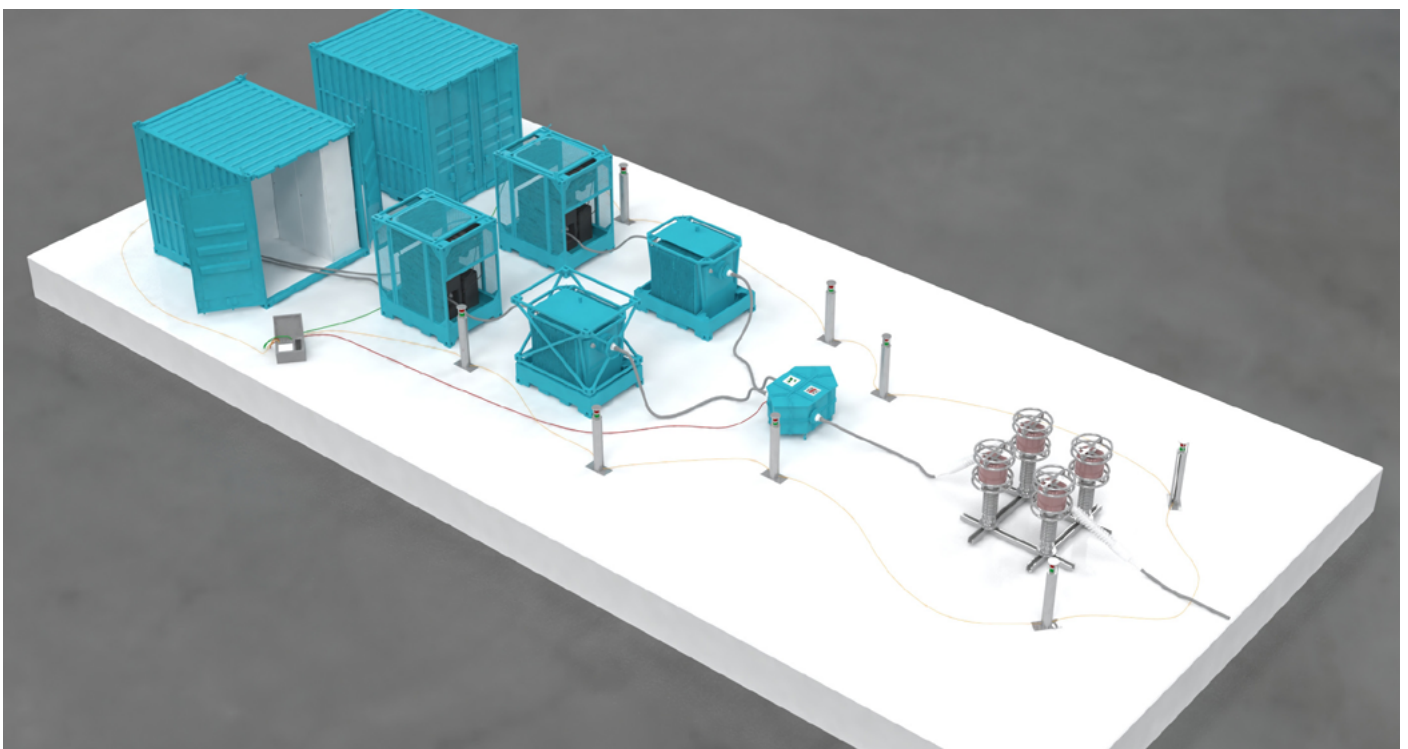

Data Sheet

Offshore 80 kV RTS test Set

Systems parameters RTS

| | |
|---------------------------|---|
| Max. out put voltage | 80 kV |
| Power Supply | Mains supply, Voltage 3NPE 230/400 + - 10%, 50/60HZ 160 KVA Diesel Generator Supply >= 640 KVA |
| Rated Current | 37.5 A with 1 Reactor , 75 A with 2 Reactor |
| Operating Frequency range | 20 Hz, 30... 300 Hz in compliance (At reduced voltage, U ≤ 53 kV) |
| Max. Load Capacitance | Subject to system analysis |
| Duty Cycle | 1 Hour ON, 1 Hour OFF, 6 Cycles per day |
| DNV Compliance | Approved to DNVGL-ST-E271 |
| Reactors | Hermetically sealed tank design - Oil Filled |
| Collection Point | x5 Pfisterer Connex (Size 4) Allows connection of upto four reactors to the test object |
| Cable Details | Test cable 15 m – outdoor termination to Pfisterer Size 4 Connection Point Cable 100 m – to connect between test system and Connection point Reactor Cables 10 m- Connecting reactors to Collection Point |
| Operating temperature | -10°C ... 30°C non condensing |

Feeding Container

| HV110DS Offshore System | Resonant Reactor |
|-------------------------|-------------------|
| Weight | Weight (Each) |
| Dimensions (LxWxH) | Dimension (LxWxH) |

Resonant Power Frame

| DS110 Offshore System | Connection Point |
|-----------------------|--------------------|
| Weight (each) | Weight (Each) |
| Dimensions (LxWxH) | Dimensions (LxWxH) |

For more information regarding
JDR Services, please email:

 sales.support@jdrcables.com

 jdrcables.com

Newcastle
Neptune Energy Park,
Neptune Road
Walker
Newcastle upon Tyne
NE6 4LG, UK
T | 44 (0) 191 917 7000

Hartlepool, Maritime House,
County Durham
Hartlepool, Victoria Dock,
County Durham
Littleport, Cambridgeshire, UK
Houston, Texas, USA



Houston Service Center
2012 S Persimmon St.
Tomball, Texas 77375, USA
T | +1.832.448.3500

JDR is a leading provider of technology connecting the global energy industry. Our products and services enable vital control and power delivery for offshore oil & gas and renewable energy systems. The world's energy companies depend on high performing control umbilical and/or power cable systems to operate in the world's harshest environments. JDR invests in state of the art manufacturing facilities, technology and people to deliver these world class energy connection/control products and services. We have a proven track record of delivering client expectations and are totally committed to full lifecycle customer services. We achieve this through our specialist engineering teams, experienced project managers, integrated safety systems and global service network which ensures 24/7 aftermarket support.